

AJAY SENSORS & INSTRUMENTS

SS104 Series Piezoresistive Pressure Sensor Element

Application

- 1, Industrial process control
- 2, Liquid pressure system and switch
- 3, Level measure
- 4, Gas, liquid pressure measure
- 5, Pressure inspection meter
- 6, Pressure calibrator
- 7, Cooling equipment and air conditioner
- 8, Aviation and navigation inspection



Feature

- 1, High accuracy, High reliability.
- 2, Constant current power supply
- 3, Absolute, Sealing pressure is optional
- 4, Wider temperature compensation range
- 5, Isolated construction, Enable to test various media

Performance & Parameters

Power Supply	1.5 mADC
Span Output	~100mV
Zero Output	±2 mVDC
Accuracy	0.5%; 1%; 2%
Measuring Range(Gauge)	0~600KPa...10MPa
Overload	≤10MPa
Temperature Compensation	
Operating Temperature	-40~125°C
Input Impedance	4 KΩ~5KΩ
Zero Thermal Error	±0.02%FS/°C
Span Thermal Error	±0.02%FS/°C

Construction

O-Ring	Viton
Diaphragm	Stainless steel
Housing	Stainless steel
Filling Liquid	Silicone oil
Diameter	Ø19mm
Height	5.6mm
Electric connection	Kovar pin

AJAY SENSORS & INSTRUMENTS



No 45/17, Gubbanna Industrial Garden, VI Block, Rajajinagar,

BANGALORE 560010

Tel: 23304997, Fax: 23381040, email: ajaysensors@yahoo.com

AJAY SENSORS & INSTRUMENTS

Dimensions & Connections

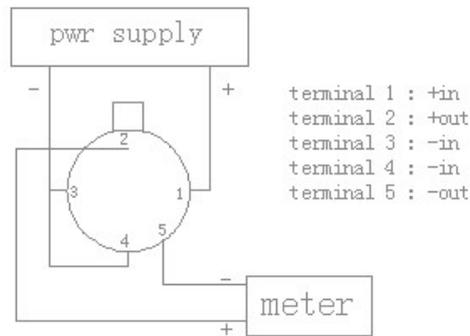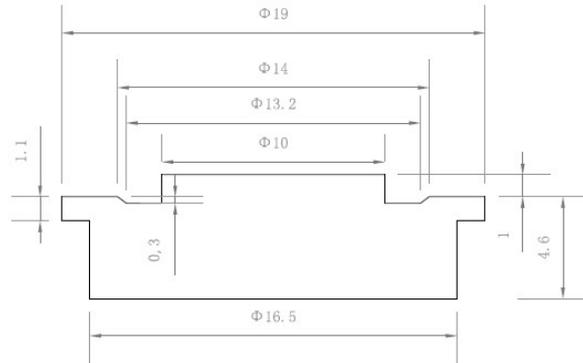

bottom view

Ordering Guide

Model	Pressure Range	Power Supply	Output Signal	Pressure Port	Electric Connection	Accuracy	Other
SS104		----	----	----	---		---
SS104	5Mpa					0.5%	

AJAY SENSORS & INSTRUMENTS

No 45/17, Gubbanna Industrial Garden, VI Block, Rajajinagar,

BANGALORE 560010

Tel:23304997, Fax: 23381040, email: ajaysensors@yahoo.com